

# **National Institute of Technology Sikkim**

Ravangla Campus, Barfung Block, South Sikkim 737139

**Tender Name: Supply and Installation of extension WiFi & LAN Setup**

Tender No: 06/NITS/Works/ICTI-WiFi/15-16/20 Dated 06/08/2015

Pre Bid Meeting Date: 17/08/2015 from 2:30 PM to 5:00 PM

Last Date of Submission: 29/08/2015 till 5:00 PM

Date of Opening (Technical): 31/08/2015

**Published on: [www.nitsikkim.ac.in](http://www.nitsikkim.ac.in)**

National Institute of Technology (NIT) Sikkim, Ravangla, South Sikkim – 737 139, invites tender for supply and Installation of an extension of WiFi & LAN Setup at NIT Sikkim as per specifications given in the “Annexure – A” attached to this Tender document annexed hereto. All offers should be made in English and should be written in both figures and words. The bidders are requested to read the tender document carefully and ensure compliance with all specifications/instructions herein. Non-compliance with specifications/ instructions in this document may disqualify the bidders from the tender process.

The Institute reserves the right to accept or reject any quotations or to select the item (in single or multiple units) or to reject the bidding process or any quotation wholly or partly without assigning any reason.

## ANNEXURE -A

### TECHNICAL SPECIFICATIONS

| <b>SL-1. Wireless Outdoor Access Point (Qty-4 nos)</b> |   |   |                               |
|--|---|---|-------------------------------|
| S/N  | Specification / Requirement   | Compatible with proposed/existing controller (Yes/No) | Remarks on Deviation (If Any) |
| 1  | The Access Point should have minimum 1 Port 10/100/1000Mb POE in Ethernet port.   |   |                               |
| 2  | 802.11n Access Point should be able to power up using standards 802.3af POE input, and at the same time operate in full MIMO mode. It must have option to power through 12 VDC power Adaptor. |   |                               |
| 3  | AP is expected to have Dual Radios to support 2.4 GHz & 5 GHz concurrent users with 802.11 a/b/g/n/ac capability. AP Must support 2x2 or better MIMO with 2 Radio Chain                       |   |                               |
| 4  | AP is expected to be able to handle at least 200 Concurrent users.  |   |                               |
| 5  | EIRP should be limited as per govt. regulation for outdoor AP's   |   |                               |
| 6  | Wireless Interface: Dual radio; 802.11a/b/g/n/ac; 2.4 Ghz and 5 Ghz concurrent support.   |   |                               |
| 7  | SSID support : 16 BSSID (8 BSSID per Radio)   |   |                               |
| 8  | AP is expected to support upto 300Mbps datarates in 2.4Ghz 802.11b/g/n and upto 867 Mbps in 5Ghz 802.11a/n/ac.  |   |                               |
| 9  | The access point should support 802.1q VLAN tagging   |   |                               |
| 10   | Antenna: Integrated/External for Sectorial 120 degree (as specified in BOQ) coverage, with min 4 dB Gain for 2.4Ghz and 5Ghz both expected.   |   |                               |
| 11   | Support the operating temp -10° to 55° C and Humidity: 15 to 95% non-condensing.  |   |                               |
| 12   | The access point should support following security mechanism: WEP, WPA-PSK, WPA-TKIP, WPA2 AES, 802.11i.  |   |                               |
| 13   | Web User Interface (HTTP/S) • CLI (Telnet/SSH), SNMP v1, 2, 3   |   |                               |
| <b>SL-2. Wireless Indoor Access Point (Qty-5 nos)</b>  |   |   |                               |
| S/N  | Specification / Requirement   | Compatible with proposed/existing controller (Yes/No) | Remarks on Deviation (If Any) |
| 1  | The APs should support the 802.11a, 802.11b, 802.11g and 11n and ac standards. It should also support 802.11ac standard in the 5 GHz band.  |   |                               |
| 2  | Simultaneous client support on dual band radio is expected  |   |                               |
| 3  | The access points should be centrally managed.  |   |                               |
| 4  | The access point is expected to be able to detect clients that have dual band capability and automatically steer those client to use the 5GHz band instead of the 2.4GHz band.                |   |                               |
| 5  | The access point should have minimum 1 Gigabit Ethernet port.   |   |                               |
| 6  | The access point should support 802.1q VLAN tagging   |   |                               |
| 7  | The access point should support WPA2 enterprise authentication and AES/CCMP encryption. AP should support Authentication via 802.1X and Active Directory.                                     |   |                               |
| 8  | Implement Wi-Fi alliance standards WMM, 802.11d, 802.11h and 802.11e  |   |                               |

Signature (in ink, with date) & Seal of Bidder/Tenderer

| 9                               | The Access Point should provide for concurrent support for high definition IP Video, Voice and Data application without needing any configuration.   |   |                               |
|---------------------------------|--|---|-------------------------------|
| 10                              | Channel selection based on measuring throughput capacity in real time and switching to another channel should the capacity fall below the statistical average of all channels.   |   |                               |
| 11                              | Support up to 200 clients per AP is expected   |   |                               |
| 12                              | Support DHCP Option 82 in standalone mode (without Controller) as well as in Managed mode (with Controller) is expected  |   |                               |
| 13                              | For troubleshooting purposes, the administrator should have the ability to remotely capture 802.11 and / or 802.3 frames from an access point without disrupting client access.  |   |                               |
| <b>SL-3. Switch (Qty-4 nos)</b> |  |   |                               |
| S/N                             | Specification / Requirement  | Compatible with proposed/existing controller (Yes/No) | Remarks on Deviation (If Any) |
| 1                               | L2 Managed Switch having 24x10/100/1000 BaseT ports and 4xSFP slots  |   |                               |
| 2                               | Switching Capacity is expected to be at least 56 Gbps  |   |                               |
| 3                               | Packet Forwarding Rate is expected to be at least 41.7Mpps for 64-byte packet size   |   |                               |
| 4                               | The switch should have non-blocking architecture & wire-speed performance under fully loaded condition from day-1  |   |                               |
| 5                               | It should have hardware reset button   |   |                               |
| 6                               | Expected MAC Address Table size: At least 16000, support at least 256 static MAC   |   |                               |
| 7                               | IGMP v1 v2 with at least 256 IGMP snooping groups, Per VLAN IGMP Snooping, port based IGMP snooping fast leave.  |   |                               |
| 8                               | LLDP, LLDP-MED, IPv6 Neighbor Discovery, L2 multicast filtering,   |   |                               |
| 9                               | IEEE802.1D STP, 802.1w RSTP, Root guard or equivalent feature.   |   |                               |
| 10                              | The switch should be able to avoid the loop occurring in a single port connected to an unmanaged switch/hub by shutting down the corresponding port or corresponding VLAN  |   |                               |
| 11                              | IEEE 802.3ad Link Aggregation with at least 8 ports per groups & 14 groups per switch.   |   |                               |
| 12                              | Port mirroring for Tx/Rx/Both. One-to-One mode, Many-to-one mode   |   |                               |
| 13                              | The switch is expected to have Port-based ingress & egress bandwidth control with minimum granularity of atleast 64kbps  |   |                               |
| 14                              | The switch is expected to have the following security features from Day-1: SSLv3, Broadcast/Multicast & Unicast storm control, port security feature with at least 64 MAC per port, traffic segmentation, ARP spoofing prevention, IEEE 802.1x, DHCP server screening, Binding of IP address with MAC address & interface. |   |                               |
| 15                              | The switch is expected to have feature to protect the CPU from protocol control packet attack.   |   |                               |
| 16                              | The switch should have cable diagnostic feature to check the status of connected RJ45 cables.  |   |                               |
| 17                              | The Switch is expected to have following Management features from day-1: Web-based GUI, CLI, Telnet Server, TFTP Client, SNMPv1v2cv3, SNMP trap, BootP/DHCP Client, SNTP, Syslog, ICMPv6, IPv4 & v6 dual stack   |   |                               |
| 18                              | The switch is expected to have Energy saving green technology based on cable length & link status. IEEE 802.3az  |   |                               |
| 19                              | The switch should be RoHS compliant  |   |                               |

Signature (in ink, with date) & Seal of Bidder/Tenderer

**SL—4 Any other relevant item(s) including controller if required**


|  |  |  |  |
|--|--|--|--|
|  | Please enumerate the item(s) below. You may use extra page(s) for specification/clarification on your proposal |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |

**ANNEXURE-B****OFFERED MAKE & MODEL LIST**


| <b>SL</b> | <b>Item</b>                   | <b>Item Description</b>  | <b>MAKE</b> | <b>MODEL / PART NO.</b> |
|-----------|-------------------------------|--|-------------|-------------------------|
| 1         | Wireless Outdoor Access Point | SPECIFICATION AS PER ANNEXURE-A, SL-1  |             |                         |
| 2         | Wireless Indoor Access Point  | SPECIFICATION AS PER ANNEXURE-A, SL-2  |             |                         |
| 3         | Switches                      | SPECIFICATION AS PER ANNEXURE-A, SL-3  |             |                         |
| 4         | Racks                         | 6U Wall Mounted Rack with PDU, Screw & Glass Door  |             |                         |
| 5         | UPS                           | Minimum 550VA UPS with built-in Battery  |             |                         |
| 6         | STP Cable                     | STP CAT5 Cable, Roll of 305 Mtr.   |             |                         |
| 7         | STP Connectors                | STP RJ45 Connectors  |             |                         |
| 8         | Patch Cord                    | 1Mtr UTP Patch Cord  |             |                         |
| 9         | Pole                          | GI Pipe /Pole , 6Mtr length ( for mounting Aps)  |             |                         |
| 10        | Fiber Optic Cable             | 6 Core SM Out Door Fiber Cable   |             |                         |
| 11        | LIU - 12 Port                 | 12 Port Rack Mountable LIU loaded with Adaptors & Pigtaills  |             |                         |
| 12        | CAT6 Cable                    | UTP CAT6 Cable Box, Roll of 305Mtr   |             |                         |
| 13        | Switches                      | 24 Port Semi/web Managed Gigabit Switch with atleast 4 SFP slots (SPECIFICATION AS PER ANNEXURE-A, SL-3) |             |                         |
| 14        | CAT6 Cable                    | UTP CAT6 Cable Box, Roll of 305Mtr   |             |                         |
| 15        | Patch Panel                   | CAT6 Patch Panel - 24 Port, Rack Mountable   |             |                         |
| 16        | I/O Box                       | CAT6 I/O with Single Face Plate & SMB  |             |                         |
| 17        | Patch Cord - 1Mtr             | CAT6 1Mtr Length UTP Patch Cord  |             |                         |
| 18        | Patch Cord - 2Mtr             | CAT6 2Mtr Length UTP Patch Cord  |             |                         |
| 19        | RACK 6 U                      | 6U Wall Mount Rack with PDU, Screw Pack, Tray etc..  |             |                         |
| 20        | Any other required item(s)    | Please enumerate the item(s) below. You may use extra page(s) for this as per SL-4 of Annexure A         |             |                         |

Signature (in ink, with date) &amp; Seal of Bidder/Tenderer

**ANNEXURE-C**  
**NATIONAL INSTITUTE OF TECHNOLOGY SIKKIM**  
**EXISTING NETWORK DIAGRAM**

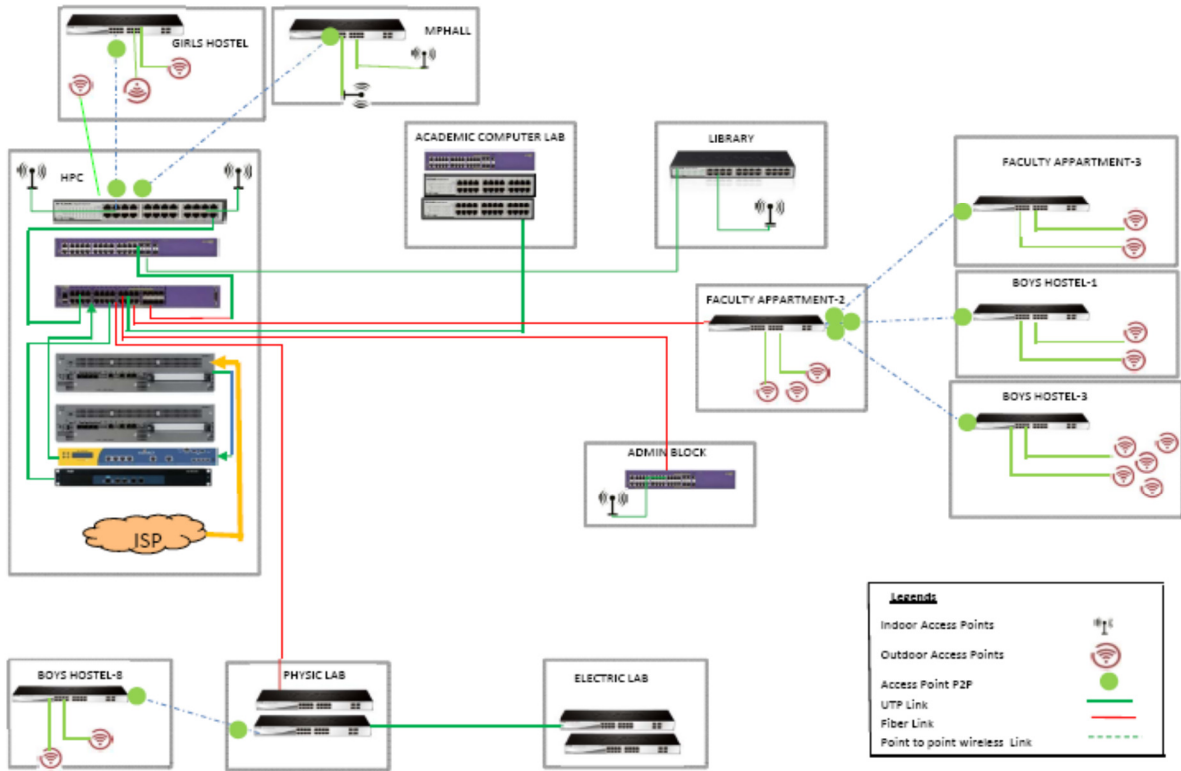

**NATIONAL INSTITUTE OF TECHNOLOGY SIKKIM**  
**PROPOSED DIAGRAM WITH NEW CONNECTIVITY**

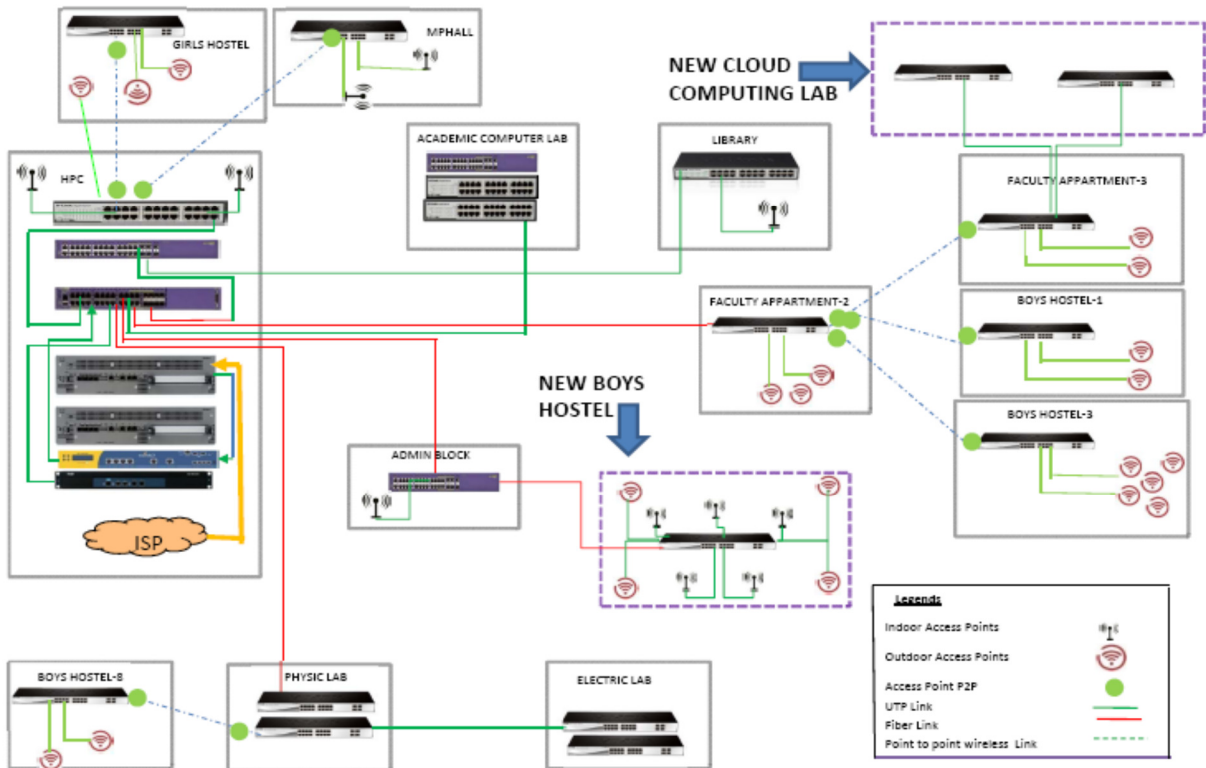

Signature (in ink, with date) & Seal of Bidder/Tenderer

## Other Requirements:

1. All the offered Active & Passive components mentioned in the BOQ should be of reputed make.
2. Proper WiFi and LAN setup should be done by the successful bidder. The setup may be controlled & managed by the existing central devices or the bidder may propose suitable controller(s).
3. Digging, Cutting, Filling, Laying (including PVC conduit / HDPE pipe/ GI Pipe wherever required), Fixing and installation of the entire equipment will be responsibility of the successful bidder.
4. 3 years' Product & Service support for the entire setup is to be given at the Ravangla Campus.
5. The bidder/OEM is expected to have a proper support infrastructure (with trained engineers) to handle the implementation and support of the system at NIT Sikkim, Campus.
6. The Passive Products of OEMs with minimum 3 years of Indian operation will be preferred for Technical evaluation.
7. Active components (Wireless Controller, AP's), Switch and SFP modules proposed by the bidder may be compatible with existing setup of NIT Sikkim or may be compatible with the proposed controller(s) by the bidder.
8. The Bidder must be in Business of providing IT related infrastructure solutions to Mission critical Govt PSU's / Govt Institutions for minimum period of 3 years, references in this respect should be given along with credentials.
9. The OEM of Active components (Wireless & Switching) should be an established vendor with presence in India at least for the last 3 years; proof for the same should be submitted by the bidder.
10. The bidder should have experience for at least 3 years and should have executed projects on latest technologies. They would provide E2E services (A Single point of Contact for Passive components, Active components, Security etc.).
11. OFFERED MAKE & MODEL LIST format must be as per "Annexure-B".
12. The bidders may propose additional items as per SL – 4 of Annexure-A to complete the job.
13. The bidders may exclude item(s) mentioned in Annexure-B if not required for their proposal for job completion. In that case, please write **NOT required** against the item(s) in Annexure-B with your justification(s). Similarly, mention the same against item(s) for price bid as per Annexure-D.
14. The Institute reserves the right to accept or reject such justification(s).

## General Terms and conditions:

1. Order will be placed as per the Turnkey basis. If any extra components / items required to complete the job should be include into the offer by the bidder and this shall be valid only for this particular contract.
2. No extra/additional cost, apart from offered value, will be given to the successful bidder to complete the entire job in all aspect in any situation without approval from the competent authority.
3. Overview of existing network and required network is provided in the "Annexure- C". **However, bidders are advised to survey the site before quoting.**
4. Material delivery, execution of work and service support are to be done at NIT Ravangla Campus.
5. Transportation, staying & food facility of worker will be the Bidder's responsibility.
6. ISO certified bidder may be preferred.
7. Photocopy of Company/firm registration, PAN Card, CST / VAT registration Certificate, Service, Tax Registration Certificate etc. are to be enclosed.
8. The bidder should have experience in supply, integration, commissioning for at least two reputed organizations (within India) e.g. Mission critical PSU/Defense Installations / Government related organizations (proof may be supplied).

Signature (in ink, with date) & Seal of Bidder/Tenderer

9. The bidder must have the capability to execute, operate and manage a large network of similar size; reference in this respect should be provided in the form of purchase orders and/or performance / completion certificate from end customer.
10. The products quoted should have full period of Life at the time of delivery and OEM should support the products quoted for at least 3 years from the date of installation and a letter to this extent need to be attached as a proof.
11. The quotations shall be submitted in a sealed envelope duly marked “**Quotation against Tender enquiry No.: 06/NITS/Works/ICTI-WiFi/15-16/20 dated 06/08/2015 Closing Date on 29/08/2015**” on the corner of the envelope.
12. The printed literature and catalogue / brochure giving full technical details may be included with the technical bid to verify the specifications quoted in the tender. The bidders may submit copies of suitable documents in support of their reputation, credentials and past performance. The rates should be quoted in figures (typed or printed) and cutting should be avoided. The final amount should be written in figures as well as in words. **The bids should be addressed to “The Assistant Registrar, National Institute of Technology Sikkim, Ravangla Campus, Barfung Block, South Sikkim 737139”.**
13. All tender documents should have to be sent through speed post or registered post only or may be dropped in the tender box at the NIT Sikkim.
14. Quotation received after closing date/time will not be considered.
15. If a supplier/firm is original equipment manufacturer (OEM)/authorized dealer/sole distributor of any item, the certificate to this effect must be attached.
16. The quantity shown against the items in Annexure –D, is tentative and may vary as per dynamic requirement of the Institute.
17. In the event of any dispute or difference(s) between the vendee Institute (NIT Sikkim) and the vendor(s) arising out of non-supply of material or supplies not found according to specifications or any other cause whatsoever relating to the supply or purchase order before or after the supply has been executed, shall be referred to “The Director, NIT Sikkim”, who may decide the matter himself.
18. The EMD of 52,000/- (Fifty Two Thousand only) should be enclosed along with the technical bid. The EMD should be drawn in favour of ‘The Director, NIT Sikkim’ in the form of demand draft payable at SBI, Ravangla Branch.
19. The technical bid and price bid should be in separate envelopes and kept in 3rd envelope which should be super scribed as “Technical and price bid for supply and Installation of extension WiFi & LAN Setup”.
20. The cost of the tender document is Rs. 800/-. The bidders who are downloading the document from the website should send demand draft of Rs. 800/- drawn in favour of ‘The Director, NIT Sikkim’ payable at SBI, Ravangla Branch.
21. **Clarifications:** In case the bidder requires any clarification regarding the tender documents, they are requested to contact at [ficce@nitsikkim.ac.in](mailto:ficce@nitsikkim.ac.in) at least three days (03) before closing date of the Tender.
22. **Pre – Qualification Criteria:** Bidders are expected to be the manufacturer / authorized dealer. Letter of Authorization from original equipment manufacturer (OEM) on the same and specific to the tender may be enclosed.
23. **Prices:** The Prices quoted should be inclusive of all taxes or duties, packing, forwarding, freight, insurance, delivery and commissioning etc. at destination site (NIT Sikkim, Ravangla, Sikkim). The rates shall be firm and final. Nothing extra shall be paid on any account. Way bill provided by Institute but vender must add 1% of the material cost as ECESS payable to Govt. of Sikkim.
24. **Validity:** The bid should be valid for acceptance for a period of at least sixty (60) days. The Bidders should be ready to extend the validity, if required.
25. **Delivery:** The Equipment should be delivered and installed within the period as specified in the purchase order and be ready for use within Twelve (12) weeks of the issue of purchase order unless otherwise prescribed.

26. **Liquidated Damage:** If the bidder fails to deliver and place any or all the Equipment or perform the service by the specified date, penalty at the rate of 1% per week of the total order value subject to the maximum of 10% of total order value will be deducted.
27. **Warranty:** Bidders must give the comprehensive onsite warranty as required from the date of successful installation of Equipment against any manufacturing defects and also give the warranty declaration that *“everything to be supplied by us hereunder shall be free from all defects and faults in material, workmanship and shall be of the highest quality and material of the type ordered, shall be in full conformity with the specification and shall be complete enough to carry out the experiments, as specified in the tender document.”* Any deviation in the material, and the specifications from the accepted terms may liable to be rejected and the bidders need to supply all the goods in the specified form to the satisfaction /specifications specified in the order / contract and demonstrate at the their own cost. An amount equal to 10% of the total cost of instruments shall be kept as “performance guarantee” three months beyond warranty period in the form of FD/PBG.
28. **Cancellation of Tender:** The NIT Sikkim reserves the right to cancel this tender partly or fully any time without assigning any reason, thereof. This tender document is being issued by the undersigned with the approval of the competent authority of the NIT Sikkim.

**FIICTI**

**National Institute of Technology Sikkim**

**Ravangla Campus, Barfung Block, South Sikkim 737139**



**ANNEXURE-D**  
**PRICE BID FORMAT FOR WIFI AND LAN EXTENSION**

| SL   | Item                           | Item Description   | Qty | UOM | UNIT PRICE | TAX % | TAX AMT. | TOTAL WITH TAX |
|--|--------------------------------|--|-----|-----|------------|-------|----------|----------------|
| 1  | Wireless Outdoor Access Point  | Wireless Outdoor- 802.11ac Outdoor Wireless Access Point with Sectorial Antenna including PoE injector with its power adapter and 3 year advance replacement Warranty by OEM (SPECIFICATION AS PER ANNEXURE-A, SL-1)                             | 4   | Nos |            |       |          |                |
| 2  | Wireless Indoor Access Point   | Dual Band 802.11ac Wireless Access Point, PoE support. Including PoE injector. (SPECIFICATION AS PER ANNEXURE-A, SL-2)   | 5   | Nos |            |       |          |                |
| 3  | Switches                       | 24 Port Semi/web Managed Gigabit Switch with atleast 4 SFP slots (SPECIFICATION AS PER ANNEXURE-A, SL-3)   | 2   | Nos |            |       |          |                |
| 4  | Racks                          | 6U Wall Mounted Rack with PDU, Screw & Glass Door  | 2   | Nos |            |       |          |                |
| 5  | UPS                            | Minimum 550VA UPS with built-in Battery  | 4   | Nos |            |       |          |                |
| 6  | STP Cable                      | STP CAT5 Cable, Roll of 305 Mtr.   | 1   | Box |            |       |          |                |
| 7  | STP Connectors                 | STP RJ45 Connectors  | 1   | Box |            |       |          |                |
| 8  | Patch Cord                     | 1 Mtr UTP Patch Cord   | 7   | Nos |            |       |          |                |
| 9  | Pole                           | GI Pipe /Pole , 6Mtr length ( for mounting Aps)  | 2   | Nos |            |       |          |                |
| 10   | Fiber Optic Cable              | 6 Core SM Out Door Fiber Cable   | 300 | Mtr |            |       |          |                |
| 11   | LIU - 12 Port                  | 12 Port Rack Mountable LIU loaded with Adaptors & Pigtails   | 1   | No  |            |       |          |                |
| 12   | CAT6 Cable                     | UTP CAT6 Cable Box, Roll of 305Mtr   | 2   | Box |            |       |          |                |
| <b>FOR LAN EXTENSION AT LAB :</b>                |                                |  |     |     |            |       |          |                |
| 13   | Switches                       | 24 Port Semi/web Managed Gigabit Switch with at least 4 SFP slots (SPECIFICATION AS PER ANNEXURE-A, SL-3)  | 2   | Nos |            |       |          |                |
| 14   | CAT6 Cable                     | UTP CAT6 Cable Box, Roll of 305 Mtr  | 2   | Box |            |       |          |                |
| 15   | Patch Panel                    | CAT6 Patch Panel - 24 Port, Rack Mountable   | 2   | Nos |            |       |          |                |
| 16   | I/O Box                        | CAT6 I/O with Single Face Plate & SMB  | 37  | Nos |            |       |          |                |
| 17   | Patch Cord - 1Mtr              | CAT6 1Mtr Length UTP Patch Cord  | 40  | Nos |            |       |          |                |
| 18   | Patch Cord - 2Mtr              | CAT6 2Mtr Length UTP Patch Cord  | 40  | Nos |            |       |          |                |
| 19   | RACK 6 U                       | 6U Wall Mount Rack with PDU, Screw Pack, Tray etc.   | 1   | Set |            |       |          |                |
| 20   | Any other required item(s)     | Please enumerate the item(s) below. You may use extra page(s) for this as per SI-4 of Annexure A   |     |     |            |       |          |                |
| 21   | Service / Installation charges | One time Installation & Configuration charges for all Components including laying, fixing, digging/ cutting and supply of PVC, HDPE & GI conduit as per scope of Work & NIT's requirement WITH 3 years comprehensive Product and Service Support | 1   | Job |            |       |          |                |
| <b>TOTAL AMOUNT WITH ALL TAXES &amp; DUTIES:</b> |                                |  |     |     |            |       |          |                |
| <b>TOTAL AMOUNT IN WORDS:</b>                    |                                |  |     |     |            |       |          |                |

Signature (in ink, with date) & Seal of Bidder/Tenderer

**ANNEXURE-E**

**PROFORMA FOR DIRECT PAYMENT/TRANSFER TO BANK ACCOUNT BY NIT SIKKIM**

| <b>Sl. No.</b> | <b>Particulars</b>   | <b>Infor</b> |
|----------------|--|--------------|
| 1              | Firm (Beneficiary) Name  |              |
| 2              | Please enclose a cancelled cheque and copy of PAN card.<br>Cancelled cheque & PAN card is to be submitted only once                                      |              |
| 3              | Complete Bank Account No. of the Firm [beneficiary].<br><br>In case of change in bank account vendor should write to the<br>Account Office of NIT Sikkim |              |
| 4              | Bank Name  |              |
| 5              | Bank Address   |              |
| 6              | IFSC Code no   |              |
| 7              | Mobile no (for SMS)  |              |
| 8              | Email ID (for information)   |              |

We undertake that all information provided above is correct and NIT Sikkim will not be responsible in case of any error on the part of firm.

Note: This Performa shall be enclosed with price bid

**[Seal and Signature of the firm]**

Signature (in ink, with date) & Seal of Bidder/Tenderer